



MATERIAL HANDLING

BUNDLE CONVEYOR

Conveyor configured with
Double Benders on either side.



Completed bundle can be
discharged to Benders or Bins.



The KRB Bundle Conveyor is another development in our material handling line. This conveyor allows built bundles to be delivered to benders or bins downstream. The conveyor can be configured to discharge to either side, or both sides. We can configure a system to feed benders or to discharge straight stock to bins.

Reduce crane lifts and keep your shear building bundles while the material is conveyed downstream. No more waiting for cranes to unload the bins. Reduce crane operator time, increase safety and eliminate bottle necks in your shop.

Another way KRB is helping you cut, bend and handle more rebar.





KRB
1058 Cool Creek Road
Wrightsville, PA 17368
Phone: 717-252-3667
Fax: 717-252-9247
info@krbmachinery.com





General Specifications

- All wiring meets N.E.C. (National Electrical Code) Standards.
- All electrical enclosures meet NEMA 4/12 rating. (Watertight, dust tight, oil tight).



Completed bundles are discharged onto the lift conveyor.

Then, the completed bundle is conveyed onto the bundle conveyor.

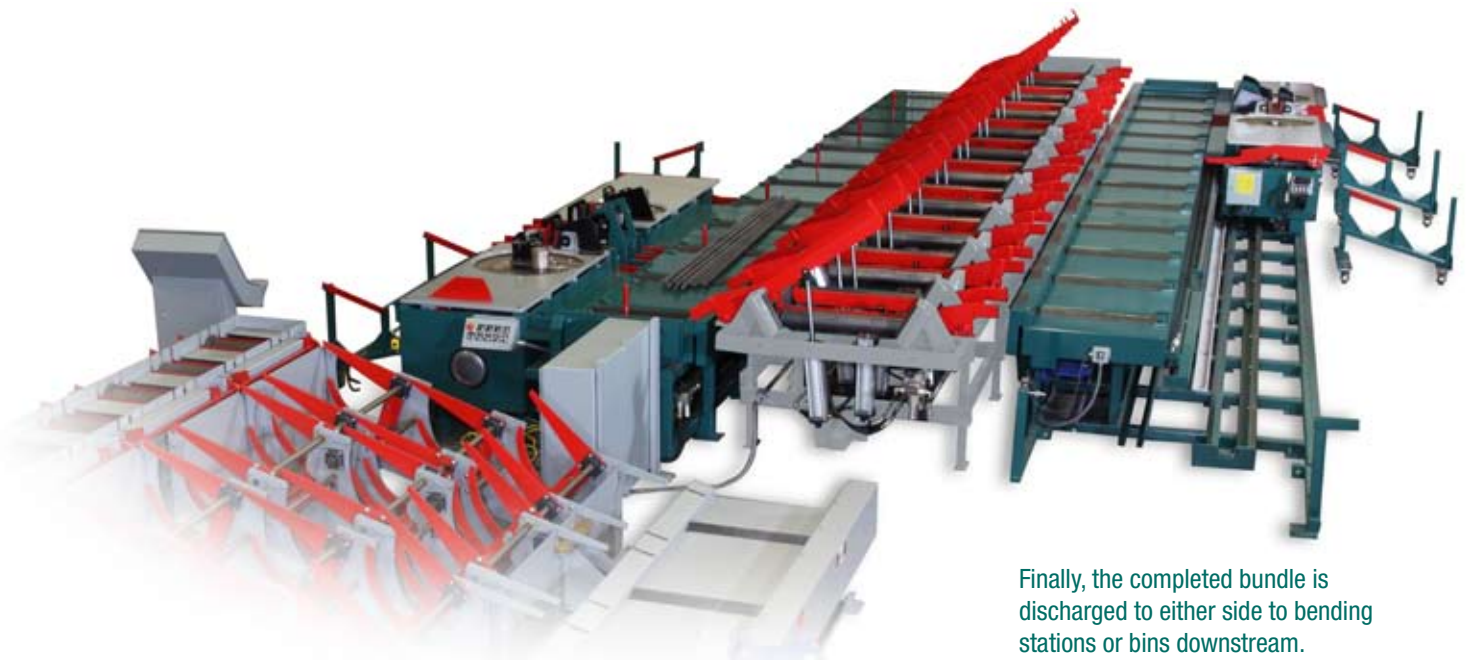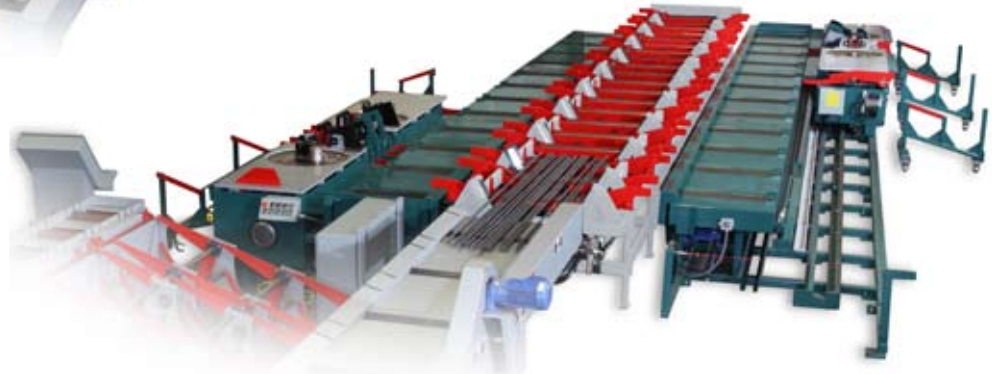

Finally, the completed bundle is discharged to either side to bending stations or bins downstream.