




CUTTING SYSTEMS BUDGETLINE

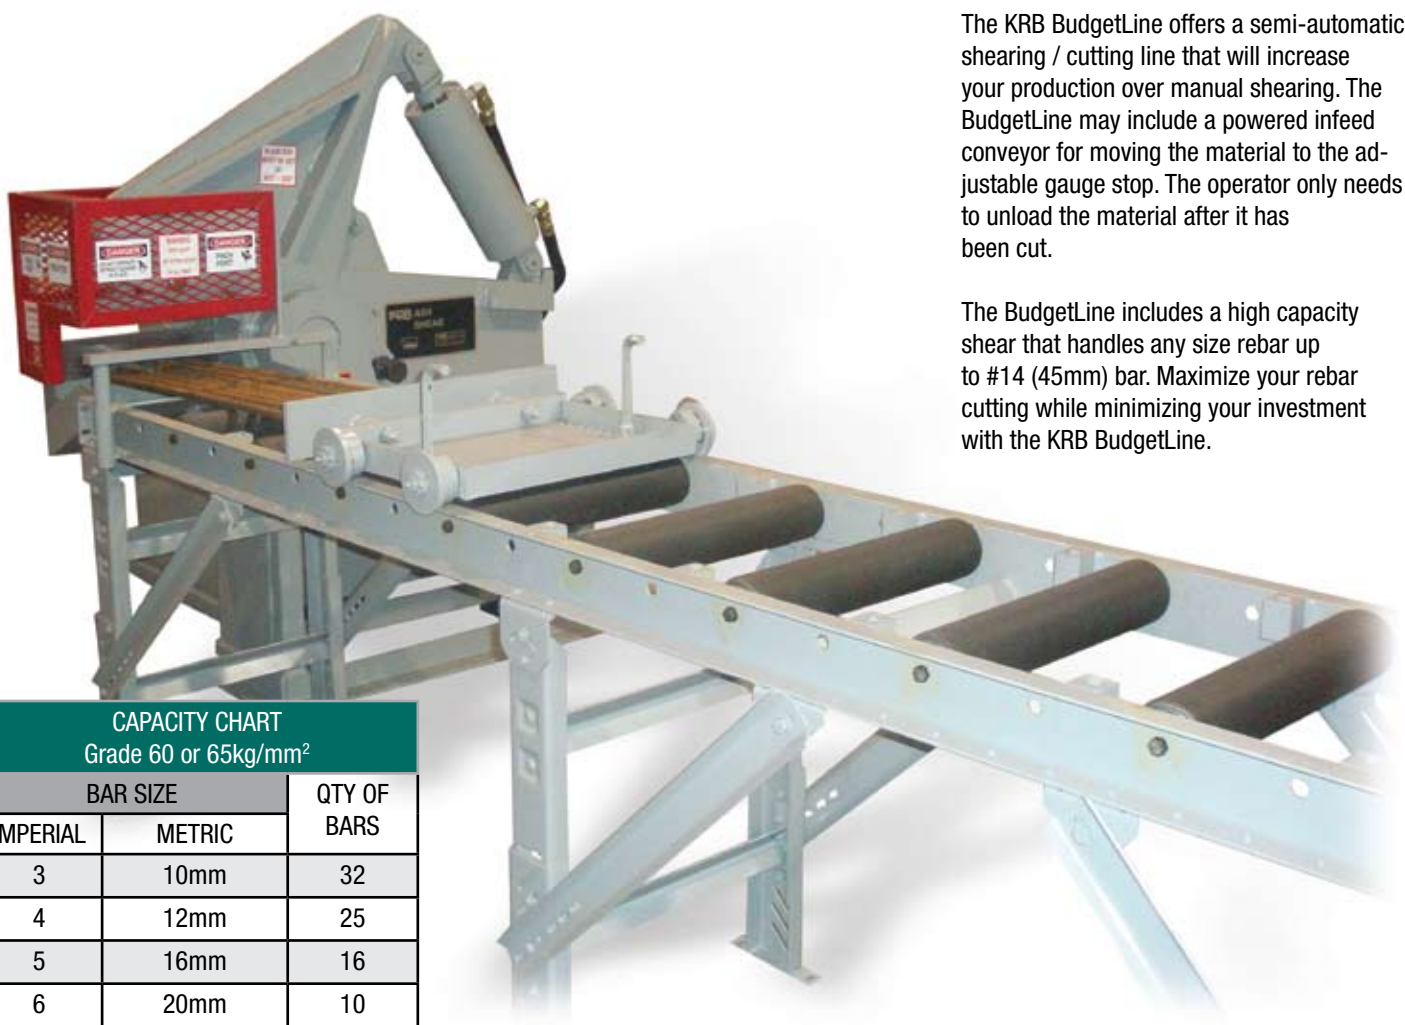

The KRB BudgetLine offers a semi-automatic shearing / cutting line that will increase your production over manual shearing. The BudgetLine may include a powered infeed conveyor for moving the material to the adjustable gauge stop. The operator only needs to unload the material after it has been cut.

The BudgetLine includes a high capacity shear that handles any size rebar up to #14 (45mm) bar. Maximize your rebar cutting while minimizing your investment with the KRB BudgetLine.

CAPACITY CHART Grade 60 or 65kg/mm ²		
BAR SIZE		QTY OF BARS
IMPERIAL	METRIC	
3	10mm	32
4	12mm	25
5	16mm	16
6	20mm	10
7	22mm	6
8	25mm	5
9	28mm	4
10	32mm	3
11	35mm	2
14	45mm	1





KRB
1058 Cool Creek Road
Wrightsville, PA 17368
Phone: 717-252-3667
Fax: 717-252-9247
info@krbmachinery.com



General Specifications

- Passline height - 36" (915mm)
- Conveyor width - 18" (450mm)
- Belt drive with high efficiency in-line gear motors
- Roller speed - 300 ft (92m) per min
- All electrical controls are U.L. (Underwriters Laboratories) and c.U.L. Listed
- All wiring meets N.E.C. (National Electrical Code) Standards
- All electrical enclosures meet NEMA 4/12 rating. (Water-tight, dust tight, oil tight)



KRB Preloaded System (optional)



Adjustable gauge table

Measuring Table Features

- Available in 10 ft (3m) modules in lengths from 10 ft (3m) thru 40 ft (12m)
- Gauge stop uses heavy duty springs to absorb impacting material
- Adjustable gauge stop is quick and user friendly KRB Preloaded System (Optional) Guards Not Shown



Guards Not Shown



Infeed Conveyor Features

- Available in 24 ft (7.3m) or 44 ft (13.4m) lengths for utilizing 20 ft (6m) or 40 ft (12m) stock
- Rollers are on 3 ft (.9m) centers
- Over the conveyor Preload System available optional
- Single tier load



Guards Not Shown

